NFP3

CCT-Power Selectable Flat Panel



DESCRIPTION

The NFP3 is a versatile and high efficacy flat panel perfect for offices, schools, retail locations, healthcare facilities, and multi-use spaces with drop ceiling mounting. Onboard CCT and power selectable switches allow users to "dial-in" the product to their requirements. Delivering the needed lumens at desk level, the flat panel has a eye-friendly emitting surface with 120 degree distribution and color temperatures from 3500K to 5000K to fit all general lighting needs. Our 5 year warranty and simple installation make the Nordeon Flat Panel an easy and effective choice.



| Date: | Туре: | . Catalog Number: |
|---------------|-------|-------------------|
| Project Name: | | |

ORDERING INFORMATION

| LUMINAIRE | | | | | | | | |
|----------------------------|------------------------------------|-------------------------------|-----------------------------------|-----------------------------|------------------------|--------------------------|------------------------|--|
| MODEL | SIZE | POWER | ССТ | CONTROL | VOLTAGE | OPTIC | FINISH | OPTION |
| NFP3 Nordeon Flat Panel | 1X4 1' x 4' ¹ | SW Power Selectable | SK CCT Selectable 35/40/50K | DIM 0-10V Dimming | UNV 100-277V | BKLT Back-Lit | WH White | EM Emergency Battery Backup Field Installed |
| | 2X2 2' x 2' | | | | | EDGLT Edge-Lit | CC Custom RAL Color | |
| | 2X4 2' x 4' | | | | | | | |

Custom solutions are available; consult factory for availability. Factory assistance is available via phone at (864) 487-3535 ext. 258 or via email at DesignServices@EXP-Brands.com.

'Note: 1x4' is only available in Edge-Lit configuration.






| | | 1x4' | 2x2' | 2x4' | | | |
|----------|-----------------------|---|------------|-------------|--|--|--|
| PHYSICAL | HOUSING | Ultra-Slim Aluminum Frame | | | | | |
| | LENS | Translucent Polycarbonate Diffuser | | | | | |
| | OVERALL DIMENSIONS | 11.75" L x 47.75" W 23.75" L x 23.75" W 23.75" L x 47.75" W | | | | | |
| | OPERATING TEMPERATURE | -4°F to 113°F | | | | | |
| | FINISH | | | | | | |
| | WEIGHT | 7.2 Pounds | 6.8 Pounds | 12.8 Pounds | | | |
| | FACTORY PRESETS | SETS 4000K and 40 Watts | | | | | |

| ELECTRICAL | POWER (field selectable) | Field Selectable 20/30/40 Watts | | | Field Selectable 30/40/50 Watts | |
|------------|--------------------------|--|--|----------|---------------------------------|--|
| | | 20 Watts | 30 Watts | 40 Watts | | 50 Watts |
| | CURRENT | 0.17 Amps at 120 Volts 0.07 Amps at 277 Volts | 0.25 Amps at 120 Volts 0.11 Amps at 277 Volts | | | 0.42 Amps at 120 Volts 0.18 Amps at 277 Volts |
| | VOLTAGE | Universal 100 to 277 Volts | | | | |
| | DRIVER | External UL Listed Class-2 Constant Current Driver | | | | |
| | CONTROL 0-10v Dimming | | | | | |
| | FREQUENCY | | | | | |
| | POWER FACTOR | | | | | _ |

| PHOTOMETRIC | LED | LED Field-Selectable 3500K, 4000K, 5000K DIMMING RANGE 100% to 0% | | | | |
|-------------|--|---|-------------|-------------|-------------|--|
| | DIMMING RANGE | | | | | |
| | COLOR RENDERING INDEX | > 8 | > 80 | | | |
| | BEAM ANGLE | 110° | | | | |
| | DELIVERED LUMEN OUTPUT (±5%) Note: Values based on 120 LPW & Edge-Lit Optic | 20 Watts | 30 Watts | 40 Watts | 50 Watts | |
| | | 2400 Lumens | 3600 Lumens | 4800 Lumens | 6000 Lumens | |
| | EFFICACY | Up to 120 Lumens per Watt | | | | |
| | LUMEN MAINTENANCE | ENANCE L70 > 50,000 Hours at 77°F* | | | | |

| CERTIFICATIONS | SAFETY | UL Listed External Driver | |
|----------------|--------------------|----------------------------|--|
| | INGRESS PROTECTION | IP20 | |
| | WARRANTY | Five-Year Limited Warranty | |




^{*} LED life may vary under actual field conditions due to external factors. Lifetime estimates are generated from actual testing in a controlled environment. Values are conservatively derived from those numbers.






DIMENSIONS

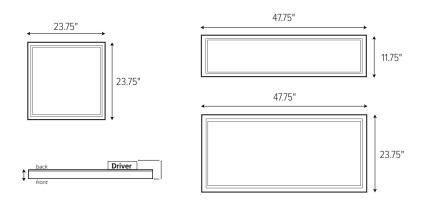



INSTALLATION INSTRUCTIONS

Retrofit Procedure:

- 1. Turn OFF power to the fixture at the breaker panel before installation.
- 2. Open the diffuser from the light fixture.
- 3. Remove the fluorescent tubes and dispose of these properly as they may contain mercury.
- 4. Remove the ballast cover and disconnect host fixture ballast from main.
- 5. Remove the fixture (A).
- 6. Open Driver box and connect AC wires and dimming wire (B).
- 7. Lay-in Panel into the ceiling (C).
- 8. Switch ON power to the fixture at the breaker panel



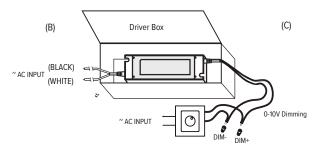






ACCESSORIES





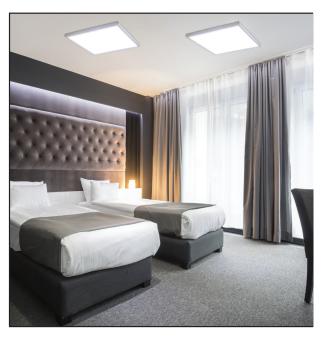



KIT INCLUDES:

- Surface Mount Kit
- Assembly Screws
- Anchoring Screws

WHAT YOU'LL NEED (NOT INCLUDED):

- Wiring supplies as specified by code
- LED Flat Panel fixture

| Number | Α | В | С | D |
|-------------|------|------|------|------|
| Accessories | سا | 1 | 1 | |
| Quantity | 2pcs | 2pcs | 8pcs | 6pcs |